



Slim Retracting Clothesline Line Replacement Manual


Suits models: Slim Retracting 4 Line (FD51201) & 6 Line (FD51200)

Important: Make sure the lines are replaced one by one.

Important: Moving parts will be adjusted. Please wear safety goggles and take precaution at all stages.

Important: Hills is not liable for any product damage caused during this process.

1. Remove all four screws located on the back panel and remove the cover.

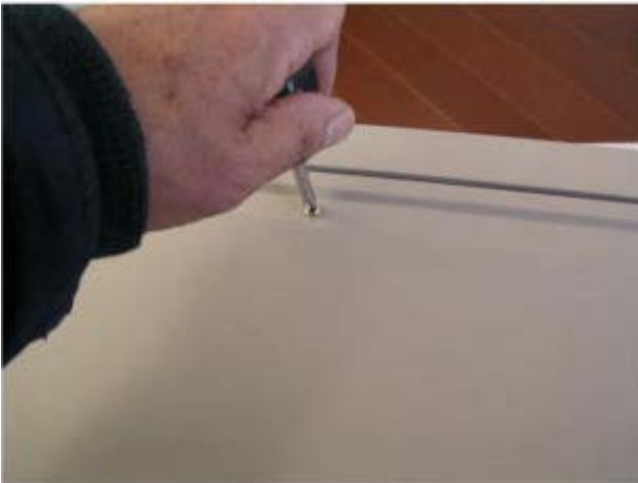

2. Pull the line out of the receiving bar & cut the knot off. *Note:* Be careful not to lose the black plastic line retainer.




3. Unscrew the reel.



4. Remove the reel. *Note:* Be careful to not to dislodge the spool axle.



5. Remove the old line from the reel.

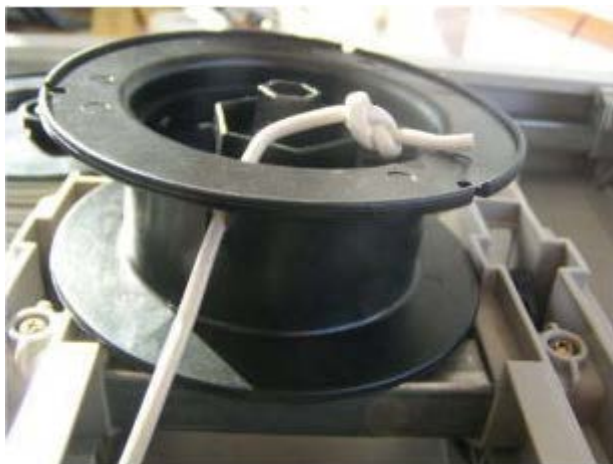

6. Insert new line & tie a knot as shown.



7. Wind the line tightly and evenly around the spool, ensuring it is not crossed over.



8. Install the spool and secure the screw firmly.



9. Mark the spool with a marker and rotate clockwise 8 times.



10. After winding the spool spring up, feed the line through the line guide and receiving bar.



11. Once the line is threaded through the receiving bar, install the black line retainer and tie the same knot that is used in part 6.



12. Once the lines have been replaced, resecure the 4 screws on the back panel and remount the unit back into its location.



Hills Contacts

We are committed to providing you with complete customer satisfaction. If you have any questions or comments about our products or services please contact your nearest customer service centre during their local business hours:

Australia:

1300 300 564

New Zealand:

0800 021 027

Hills Branded Products:

www.hills.com.au



Designed and tested under a
Quality System that meets Hills
demanding quality specifications.